

Eco Wash Green

Description

Eco Wash Green is a cleaner that easily removes dirt from rolling stock, plastic frames, painted surfaces, etc. This product is economical in use and can be diluted. This is also an environmentally friendly product and has the Nordic Swan Ecolabel.

Usage

Eco Wash Green can be applied to:

- Rolling stock
- Plastic surfaces
- Maritime/Offshore
- etcetera


Advantage

Advantages of **Eco Wash Green** are:

- Eco-certified with the Nordic Swan Ecolabel
- Removes dirt easily
- Economical in use
- Quick results

Application Tools

Apply **Eco Wash Green** with a brush, sponge or a low pressure sprayer

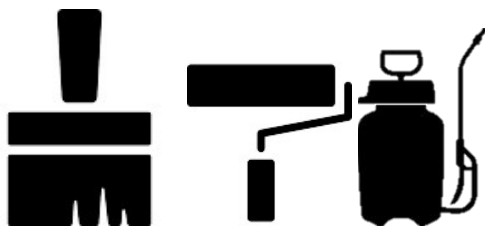

Health and Safety

- Breathing Protection: No breathing protection is required under normal use conditions with suitable ventilation. Wearing a facemask is advisable.
- Hand protection: Chemical resistant gloves should be worn.
- Skin protection: Wear protective clothing over exposed areas of skin.
- Eye protection: Chemical goggles should be worn.
- Ingestion: Ingestion may cause nausea and vomiting. Do not induce vomiting. Consult a Doctor.

KEEP OUT OF THE REACH OF CHILDREN!

Recommendation

Always carry out a test first to ensure the finished result is acceptable.

Ideal processing temperature is 5 °C – 30 °C.

The ideal processing temperature for the substrate is 5°C – 25°C.

Do not let the product dry in the sun.

Coverage rate

3 – 6 m² / liter.

Depending on the degree of dirt.

Dilute

Mild dirt	1:8/water
Heavy dirt	1:4/water

Depending on the degree of dirt.



Eco Wash Green

Application

Application:

Apply the product with a brush, sponge or low-pressure sprayer. Let the product work for 1 - 10 minutes, depending on the degree of dirt and the outside temperature. If necessary, use a brush or sponge to treat the surface. Then wipe or rinse the surface thoroughly with clean water.

Note: Never apply to hot surfaces and prevent the product from drying. Be careful on fresh painted and sensitive metal surfaces.

Equipment care

All equipment should be cleaned with water after use.

Storage

Recommended storage is in a cool, dry place with temperature 5°C – 25°C.
Store frost free.

Shelf life: 12 months in original sealed container.

Technical Support

For technical support, please do not hesitate to contact us.

Protectcoat International
Spinding 16
5431 SN CUIJK
The Netherlands

Postbus 36
5430 AA CUIJK
The Netherlands

T: +31 (0)85-06 55 797

W: www.protectcoatint.com

Follow us on Social Media.



Important:

The content of this documentation is based on our experience with the product. Protectcoat International guarantees the quality of this products but expressly disclaims all liability if the user does not follow the recommendations and conditions of use of the products, especially but not exclusively in the case of faulty application, application by untrained personnel, use of products not compatible with Protectcoat International products or adverse weather conditions. For more information, consult the Safety Data Sheet. Protectcoat International accepts no liability arising from printing errors, mistakes/typing errors.

For the latest information, visit our website.
www.protectcoatint.com

Last updated: 01/07/2022

