

# Graffiti Remover Blue-N

## Description

**Graffiti Remover Blue-N** is a graffiti remover in a gel form. The graffiti remover is suitable for removing graffiti and ink from the outside of trains, metros, trams and buses. This is a mild graffiti remover.

## Usage

**Graffiti Remover Blue-N** can be applied to the soft exterior parts of:

- Trains
- Metros
- Trams
- Buses


## Advantage

Advantages of **Graffiti Remover Blue-N** are:

- Removes graffiti easily
- Economical in use
- Several trains have been cleaned with this product

## Application Tools

Apply **Graffiti Remover Blue-N** with a brush, paintbrush or roller:

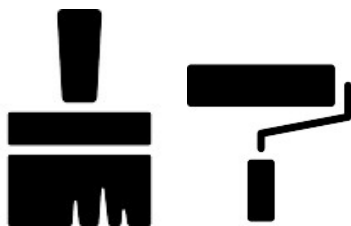

## Health and Safety

- Breathing Protection: No breathing protection is required under normal use conditions with suitable ventilation. Wearing a facemask is advisable.
- Hand protection: Chemical resistant gloves should be worn.
- Skin protection: Wear protective clothing over exposed areas of skin.
- Eye protection: Chemical goggles should be worn.
- Ingestion: Ingestion may cause nausea and vomiting. Do not induce vomiting. Consult a Doctor.

KEEP OUT OF THE REACH OF CHILDREN!

## Recommendation

Always carry out a test first to ensure the finished result is acceptable.

Air temperature between 5°C – 30°C.

Substrate temperature 5°C – 25°C

Do not let the product dry in the sun.

Do not apply to (extremely) hot surfaces.

Be careful with overpainted and sensitive metal and plastic surfaces.

## Coverage rate

0.3 – 0.5m<sup>2</sup> / liter.

Depending on the degree of dirt.



# Graffiti Remover Blue-N

## Application

Apply **Graffiti Remover Blue-N** undiluted with a brush, paintbrush or a roller. Do not apply too much at the same time to prevent drying out. Let the product dwell for 5-25 minutes.

Depending on the degree of dirt.

If necessary, use a brush or paintbrush to make sure the graffiti is dissolved.

The (stubborn) paint drops of the graffiti can be removed with a non-scratching white nylon scouring pad. Rinse the surface thoroughly with warm water and under appropriate pressure. If necessary, use a soft brush. In case of multiple layer thicknesses or old graffiti residues, the application may have to be repeated.

## Equipment care

All equipment should be cleaned with water after use.

## Storage

Recommended storage is in a cool, dry place with temperature 5°C – 30°C.

Shelf life: 12 months in original sealed container.

## Technical Support

For technical support, please do not hesitate to contact us.

**Protectcoat International**

**Spinding 16**

**5431 SN CUIJK**

**The Netherlands**

**Postbus 36**

**5430 AA CUIJK**

**The Netherlands**

**T:** +31 (0)85-06 55 797

**W:** [www.protectcoatint.com](http://www.protectcoatint.com)

**Follow us on Social Media.**



## Important:

The content of this documentation is based on our experience with the product. Protectcoat International guarantees the quality of this products but expressly disclaims all liability if the user does not follow the recommendations and conditions of use of the products, especially but not exclusively in the case of faulty application, application by untrained personnel, use of products not compatible with Protectcoat International products or adverse weather conditions. For more information, consult the Safety Data Sheet. Protectcoat International accepts no liability arising from printing errors, mistakes/typing errors.

For the latest information, visit our website.

[www.protectcoatint.com](http://www.protectcoatint.com)

Last updated: 01/01/2022