

Protectcoat EFR

Description

Protectcoat EFR removes very effectively cement and mortar stains, efflorescence, limescale and other dirt from brickwork. The product can be applied on various surfaces such as bricks, facades, concrete etc.

Protectcoat EFR is not aggressive, it does not contain hydrochloric acid and is therefore a good alternative for strong hydrochloric acid products. This product is also biodegradable and environmental friendly.

Usage

Protectcoat EFR can be applied on:

- Concrete
- Stone
- Bricks
- Facades
- Etc.


Advantage

Advantages of the **Protectcoat EFR** are:

- Highly effective and fast acting
- Contains no aggressive acids
- Does not release vapours and is free from hydrochloric acid
- Environmental friendly
- 70% more effective than phosphoric acid and citric acid

Application Tools

Apply **Protectcoat EFR** with a roller, brush or a low pressure sprayer.

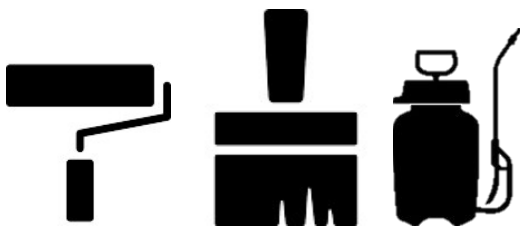

Health and Safety

- Breathing Protection: No breathing protection is required under normal use conditions with suitable ventilation. Wearing a facemask is advisable.
- Hand protection: Chemical resistant gloves should be worn.
- Skin protection: Wear protective clothing over exposed areas of skin.
- Eye protection: Chemical goggles should be worn.
- Ingestion: Ingestion may cause nausea and vomiting. Do not induce vomiting. Consult a Doctor.

KEEP OUT OF THE REACH OF CHILDREN!

Recommendation

It is advisable to carry out a test beforehand to make sure that the desired result is achieved.

Ideal application temperature 5 °C – 30 °C.

For the required result, the surface temperature should be 5°C - 25°C.

Coverage rate

0,2 – 0,5 m² / liter.

Depending on the dirtiness.

Dilute

The product should be dosed at 25% concentration in water



Protectcoat EFR

Application

Preparation:

If necessary, cover all surfaces not to be treated. Surfaces to be treated, should be wetted first.

Application:

Apply **Protectcoat EFR** with a roller, brush or a low pressure sprayer.

Allow the product to dwell for 3 – 5 minutes, depending on the dirtiness. Then apply another layer and let the product dwell for another 3 – 5 minutes. If necessary, use a brush to treat the stains and dirt. Note: do not use steel bristles.

Rinse the entire surface under appropriate pressure.

The product can be diluted.

Equipment care

All equipment should be cleaned with water after use.

Storage

Recommended storage is in a cool, dry place with temperature 5°C – 30°C.

Shelf life: 12 months in original sealed container.

Technical Support

For technical support, please do not hesitate to contact us.

Protectcoat International
Spinding 16
5431 SN CUIJK
The Netherlands

Postbus 36
5430 AA CUIJK
The Netherlands

T: +31 (0)85-06 55 797

W: www.protectcoatint.com

Follow us on Social Media.



Important:

The content of this documentation is based on our experience with the product. Protectcoat International guarantees the quality of this products but expressly disclaims all liability if the user does not follow the recommendations and conditions of use of the products, especially but not exclusively in the case of faulty application, application by untrained personnel, use of products not compatible with Protectcoat International products or adverse weather conditions. For more information, consult the Safety Data Sheet. Protectcoat International accepts no liability arising from printing errors, mistakes/typing errors.

For the latest information, visit our website.

www.protectcoatint.com

Latest update: 01/01/2022